



MAGNETIC TRACK SYSTEM




►►► Making light work

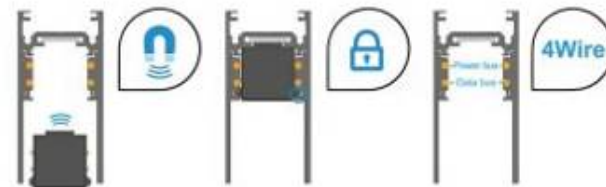

AAG TRACKS

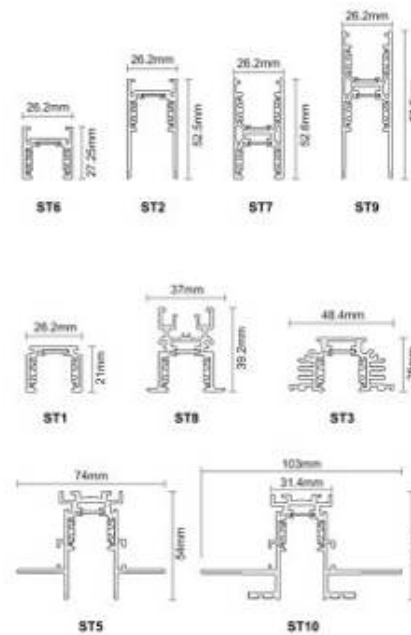

SOFT MAGNET TRACKS

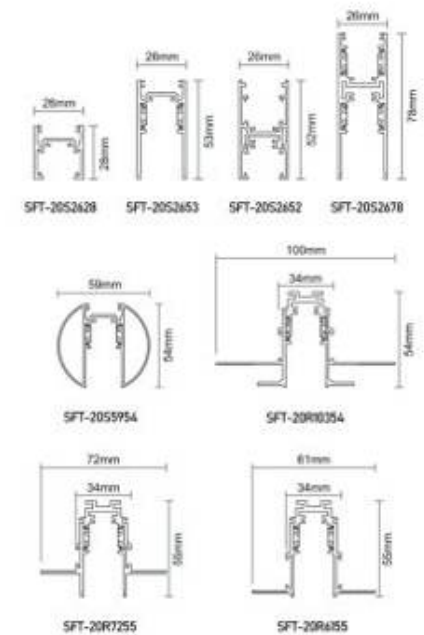





General Accessories



Accessories for rails



Track accessories



Customized special angle rail connector / 3D



In corner



L-joint 90°



Out corner






MAGNET LAMPS





Optical Lens

Model/Size

5W
SFT-20T900330512W
SFT-20T900421220W
SFT-20T9005720

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	5W	65lm/W	≥90	15°	3000K	
	12W			24°	4000K	
	20W			38°	5000K	

COB:


Color: Black White Gold

SFT-20T9003305


15°/24°/38° 3000K/4000K/5000K



H(m)	E(lx)	Angle	D(cm)
1	1494	18.31°	32
2	373		64
3	166		97




H(m)	E(lx)	Angle	D(cm)
1	1272	24.85°	44
2	318		88
3	141		132




H(m)	E(lx)	Angle	D(cm)
1	700	32.22°	58
2	175		115
3	78		173

SFT-20T9004212


15°/24°/38° 3000K/4000K/5000K



H(m)	E(lx)	Angle	D(cm)
1	2061	19.32°	34
2	515		68
3	229		102




H(m)	E(lx)	Angle	D(cm)
1	1366	24.31°	43
2	342		86
3	152		129




H(m)	E(lx)	Angle	D(cm)
1	1132	36.32°	66
2	283		131
3	126		197

SFT-20T9005720


15°/24°/38° 3000K/4000K/5000K



H(m)	E(lx)	Angle	D(cm)
1	5689	20.66°	36
2	1422		73
3	632		109



H(m)	E(lx)	Angle	D(cm)
1	5321	30.80°	55
2	880		110
3	319		165





H(m)	E(lx)	Angle	D(cm)
1	2174	41.85°	76
2	543		153
3	241		229



Optical Lens

Model/Size

5W*2
SFT-20T900331012W*2
SFT-20T9004224

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	5W*2	65lm/W	≥90	15°	3000K	
	12W*2			24°	4000K	
				38°	5000K	

COB:

Color: Black White Gold


SFT-20T9003310 (5W*2)

Ref to : R-20T9003305(5W) 15°/24°/38° 3000K/4000K/5000K

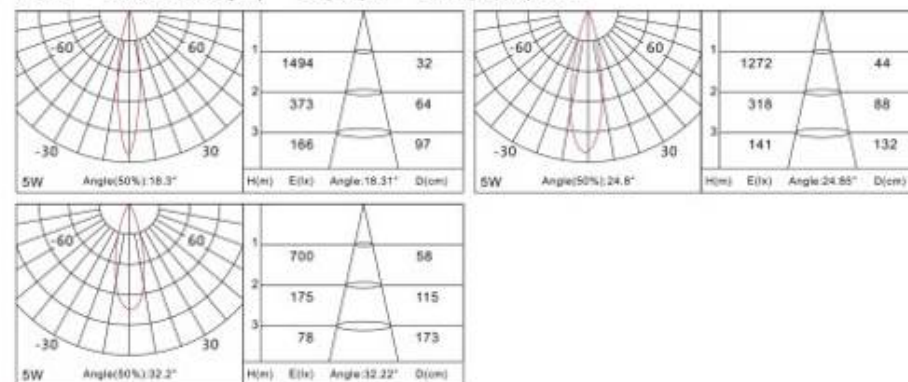

SFT-20T9004224 (12W*2)




Ref to : R-20T9004212(12W) 15°/24°/38° 3000K/4000K/5000K

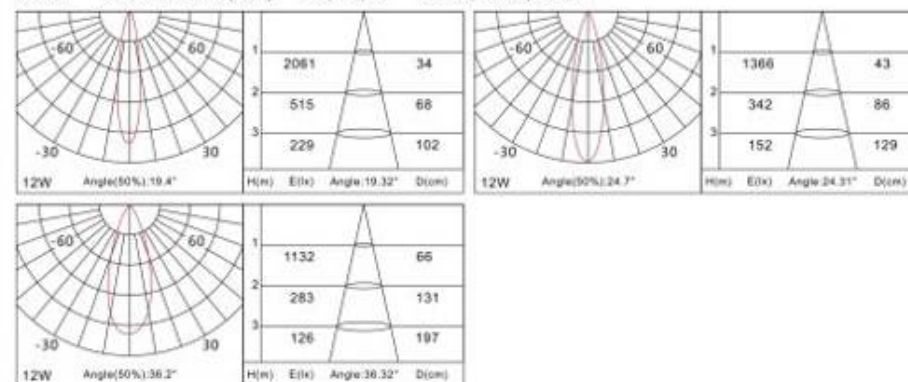



Optical Lens

Model/Size

5W
SFT-20T901300512W
SFT-20T901381220W
SFT-20T9015320

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	5W	65lm/W	≥90	15°	3000K	
	12W			24°	4000K	
	20W			38°	5000K	

COB:


Color: Black ■ White □

SFT-20T9013005


15°/24°/38° 3000K/4000K/5000K




5W Angle(50%): 18.3°




H(m) E(lx) Angle: 18.31° D(cm)




5W Angle(50%): 24.8°



H(m) E(lx) Angle: 24.85° D(cm)



5W Angle(50%): 32.2°



H(m) E(lx) Angle: 32.22° D(cm)




H(m) E(lx) Angle: 32.22° D(cm)




H(m) E(lx) Angle: 32.22° D(cm)

SFT-20T9013812


15°/24°/38° 3000K/4000K/5000K




12W Angle(50%): 19.4°




H(m) E(lx) Angle: 19.32° D(cm)




12W Angle(50%): 24.7°



H(m) E(lx) Angle: 24.31° D(cm)



12W Angle(50%): 36.2°



H(m) E(lx) Angle: 36.32° D(cm)




H(m) E(lx) Angle: 36.32° D(cm)




H(m) E(lx) Angle: 36.32° D(cm)

SFT-20T9015320


15°/24°/38° 3000K/4000K/5000K




20W Angle(50%): 20.8°




H(m) E(lx) Angle: 20.66° D(cm)




20W Angle(50%): 30.9°



H(m) E(lx) Angle: 30.80° D(cm)



20W Angle(50%): 42.1°



H(m) E(lx) Angle: 41.85° D(cm)



H(m) E(lx) Angle: 41.85° D(cm)





H(m) E(lx) Angle: 41.85° D(cm)



Optical Lens

Model/Size

5W*2
SFT-20T901301012W*2
SFT-20T9013824

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	5W*2	65lm/W	≥90	15°	3000K	
	12W*2			24°	4000K	
				38°	5000K	

COB:

Color: Black ■ White □


SFT-20T9013010 (5W*2)

Ref to : R-20T9013005(5W) 15°/24°/38° 3000K/4000K/5000K

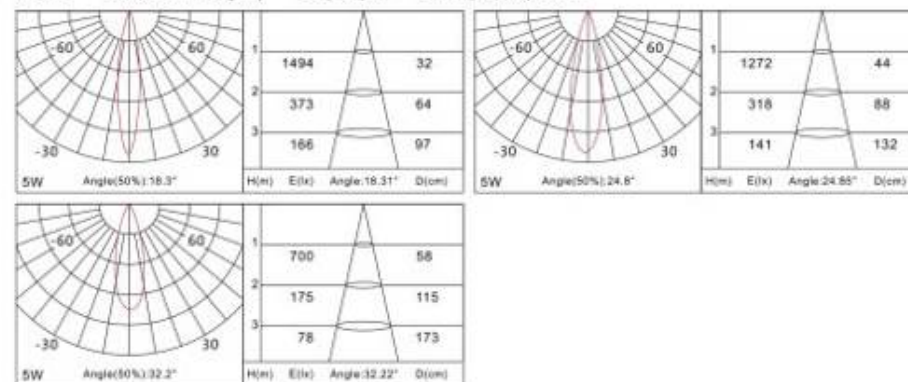

SFT-20T9013824 (12W*2)




Ref to : R-20T9013812(12W) 15°/24°/38° 3000K/4000K/5000K

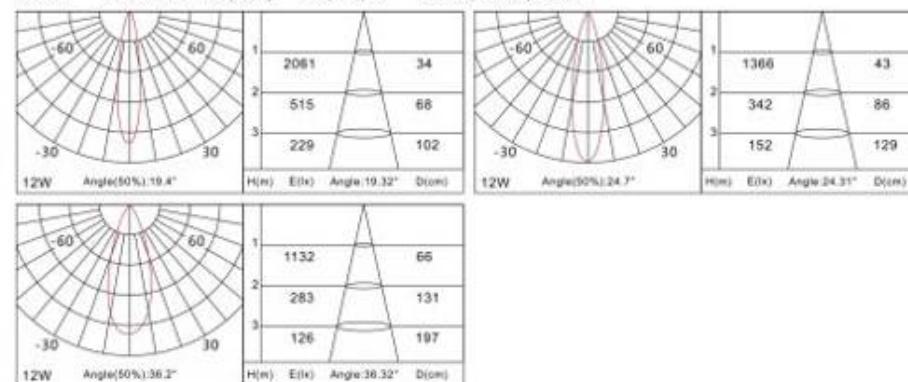



Reflector

Model/Size

10W
SFT-20T902481018W
SFT-20T902581825W
SFT-20T9026825

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	10W	65lm/W	≥90	15°	3000K	
	18W			24°	4000K	
	25W			38°	5000K	

COB:

Color: Black ■ White □


SFT-20T9024810

24° 3000K/4000K/5000K

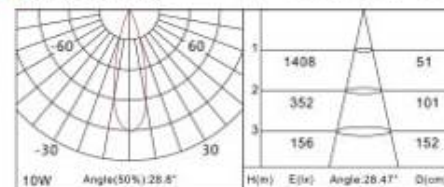


SFT-20T9025818

24° 3000K/4000K/5000K

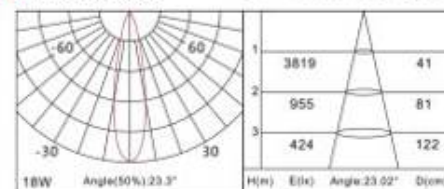

SFT-20T9026825

24° 3000K/4000K/5000K

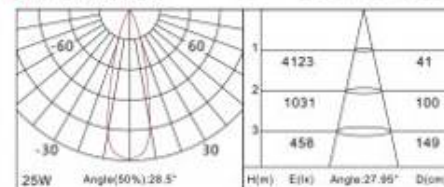



Model/Size

7W
SFT-20D8002207



15W
SFT-20D8002215



30W
SFT-20D8002230



Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	7W	50lm/W	≥90	110°	3000K	
	15W				4000K	
	30W					


SMD:

Color: Black ■




SFT-20D8002207

110° 3000K/4000K

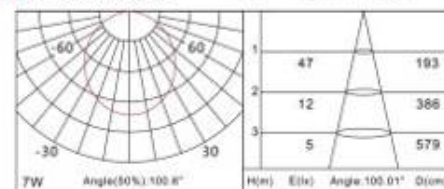

SFT-20D8002215

110° 3000K/4000K

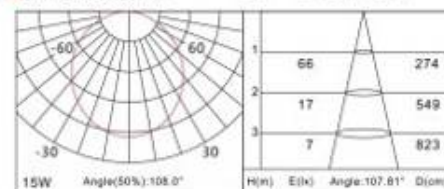




Model/Size

6W
SFT-20D8022206



12W
SFT-20D8022212



Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	6W	67lm/W	≥90	24°	3000K	
	12W			38°	4000K	


SMD:

Color: Black ■




SFT-20D8022206

24°/38° 3000K/4000K

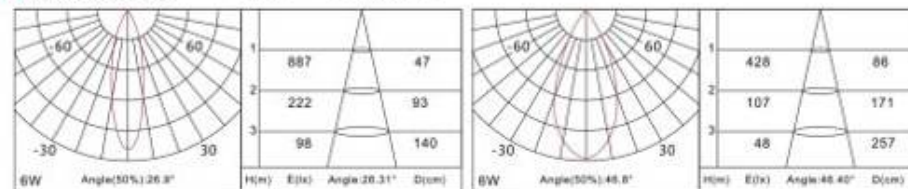


SFT-20D8022212

24°/38° 3000K/4000K

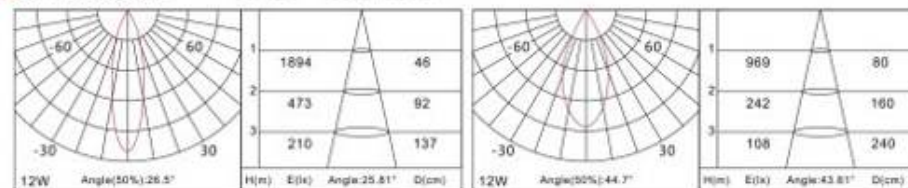



Model/Size

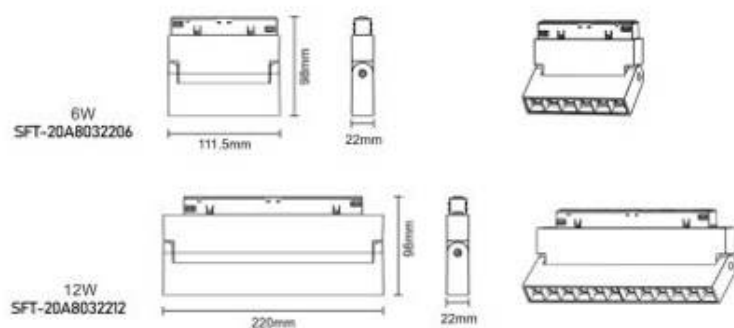

Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	6W	67lm/W	≥90	24°	3000K	
	12W			38°	4000K	


SMD: SMD: bridgeLux OSRAM SAMSUNG

Color: Black ■




SFT-20A8032206

24°/38° 3000K/4000K

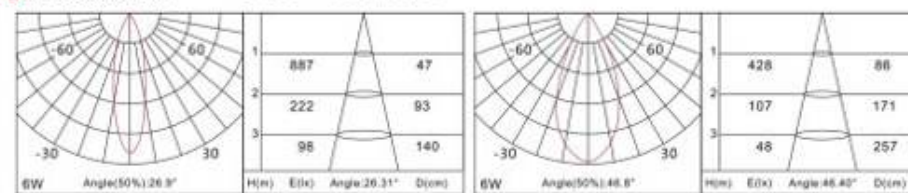

SFT-20A8032212

24°/38° 3000K/4000K

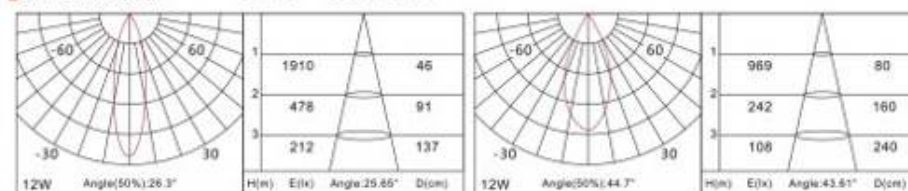




Polarized wall washer
Imported optics

Model/Size



8W
SFT-20D8052208

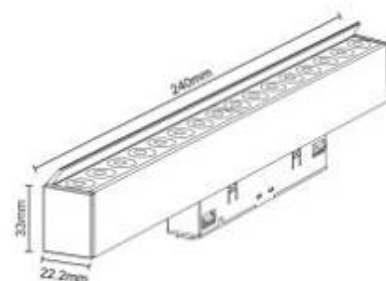

16W
SFT-20D8052216

Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	8W	70lm/W	≥90	Polarized 8°	3000K	
	16W				4000K	
					5000K	


SMD: OSRAM SAMSUNG

Color: Black ■




SFT-20D8052208

8° 3000K/4000K/5000K

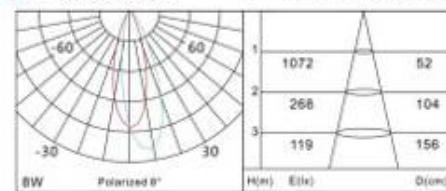

SFT-20D8052216

8° 3000K/4000K/5000K

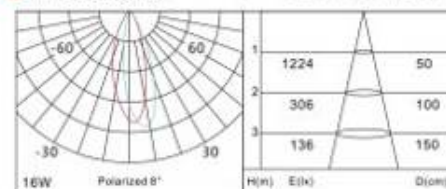


SFT-20P161

Model/Size



Reflector

7W
SFT-20P161407



Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	7W	67lm/W	≥90	15° 24° 36°	3000K 4000K 5000K	




COB:

Color: Black White Gold Wooden




SFT-20P161407

15°/24°/36° 3000K

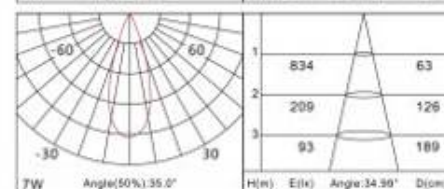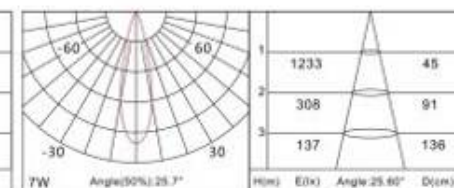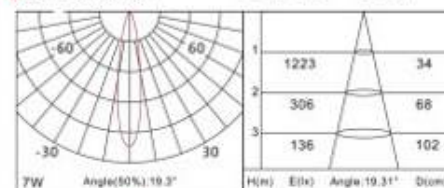


SFT-20P901

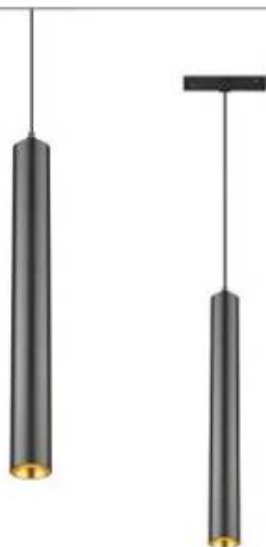

Optical Lens

Model/Size

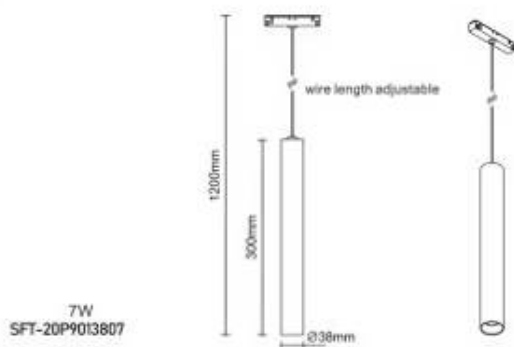

7W
SFT-20P9013807

Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	7W	67lm/W	≥90	15° 24° 38°	3000K 4000K 5000K	


COB:

Color: Black White Gold




SFT-20P9013807


15°/24°/38° 3000K



H(m)	E(lx)	Angle(50%)	D(cm)
1	1223	19.3°	34
2	306	19.3°	68
3	136	19.3°	102



H(m)	E(lx)	Angle(50%)	D(cm)
1	1094	28.3°	47
2	273	28.3°	93
3	121	28.3°	140




H(m)	E(lx)	Angle(50%)	D(cm)
1	693	36.3°	66
2	173	36.3°	131
3	77	36.3°	197

SFT-20P570



Model/Size

7W
SFT-20P5701007C

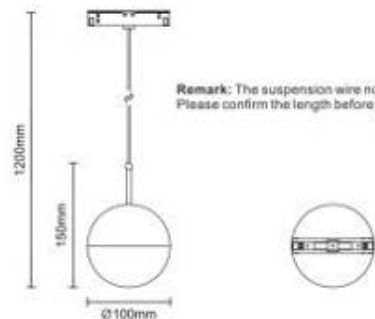

Remark: The suspension wire not adjustable.
Please confirm the length before you order.

Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	7W	70lm/W	≥90	160°	3000K	


SMD:

Color: Black ☒ White ☐




SFT-20P5701007C

160° 3000K

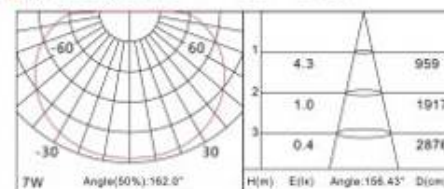



Model/Size

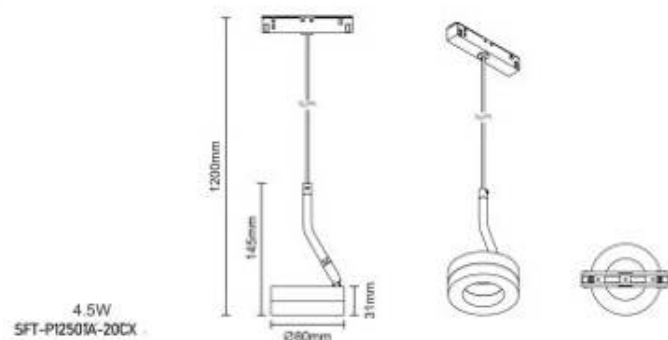


Product Information

Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	4.5W	45lm/W	≥90	120°	3000K	

SMD:


Color: Black ☒ White ☐

SFT-P12501A-20CX 120° 3000K

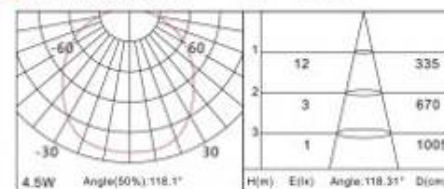



Model/Size

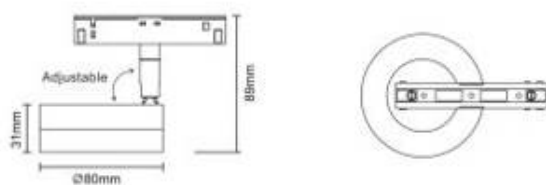

4.5W
SFT-C12501-20CX

Product Information


Input	Power	Efficiency	CRI	Beam	CCT	Optional
DC48V	4.5W	45lm/W	≥90	120°	3000K	

SMD: OSRAM SAMSUNG

Color: Sandy Black White Oxidized Gold



SFT-C12501-20CX 120° 3000K

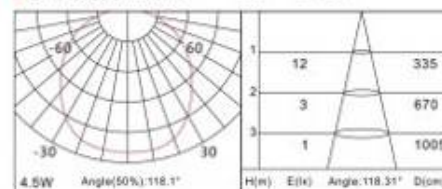



OUR VISION

Continuous innovation, Creating Excellence,
To be the Leading supplier of the lighting system solutions,
Create a more energy saving, more environmentally friendly,
more ideal lighting surroundings for customers.